




Manual

Board Mobile Series

scope of delivery – technical data
installation – reparation – stocking

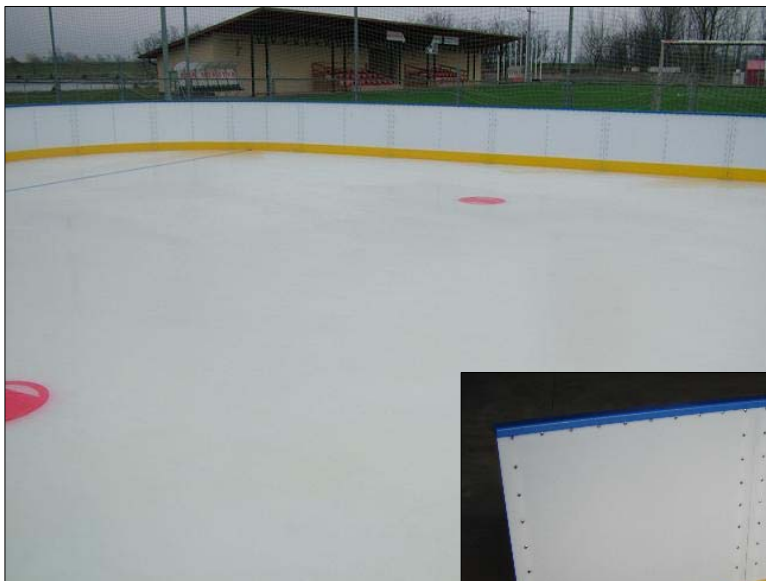



Index

1. SCOPE OF DELIVERY	3
2. TECHNICAL DATA.....	4
2.1. Dimensions.....	4
2.2. Technical data.....	4
2.3. Advertisement slot	4
3. INSTALLATION-MANUAL	5
3.1. planning of laying	5
3.2. element assembling	5
3.3. Fixing the elements	6
3.4. Advertisement slot	7
4. REPARATION-MANUAL	8
5. DISASSEMBLING-STOCKING	8
6. CONTACT-DATA.....	FEHLER! TEXTMARKE NICHT DEFINIERT.



1. Scope of delivery

- 1m elements
- 2m elements
- door-elements 2p. (2m incl. 1m door)
- gate-elements (4m incl. 3m gate for ice-preperation)
- corner-elements (if the place has corners)
- curve-elements (if the place has curves)
- connection piece (spike + wedge)
- worm-screw (adjustment of height)
- board-feet
- hand rail colour blue
- bumper colour yellow
- delivered on pallets

2. Technical data

2.1. Dimensions


element-length	1m, 2m
board-height	1,02m (fun), 1,22m (professional)
gate for ice-preparation	3m breadth
door for enter	2x1m, step 20cm
curves	optional 4m; 6m; 8,5m

2.2. Technical data

frame-material	aluminium
board-feet-material	steel hot-dip galvanised, 40cm breadth
board-material	PE 500, 8mm, UV-consistent
bumper	PE 500, height 24,5cm, thickness 12mm, yellow
hand rail	PE 20mm, blue

2.3. Advertisement slot

advertisement slot	ilinside standard outside optional Height 0,85m (fun) height 1,05m (professional) slot 5mm
---------------------------	--

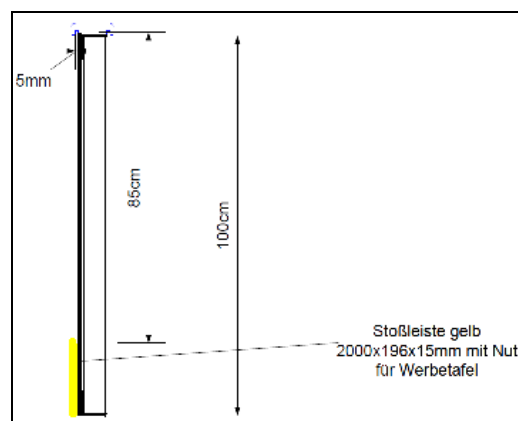

3. Installation-manual

3.1. Planning of laying

It's necessary on which position the door-elements (for enter he ice-field) and the gate-element (for the ice-preparation machine) will be positioned.

3.2. Element -assembling

The board-element will be built **directly on** the aluminium-field or on the EPDM – mats.

First the board-feet will be placed on the field so that the elements can be slide on them.

Whereas the bigger footprints have to point into the middle of the place.




On each fence-foot will be fixed two elements.



3.3. Fixing the elements

After that the elements will be stabilised. The „fixing-pin“ will slide through the opening on the backside of the fence, and the „fixing-wedge“ will fix them.

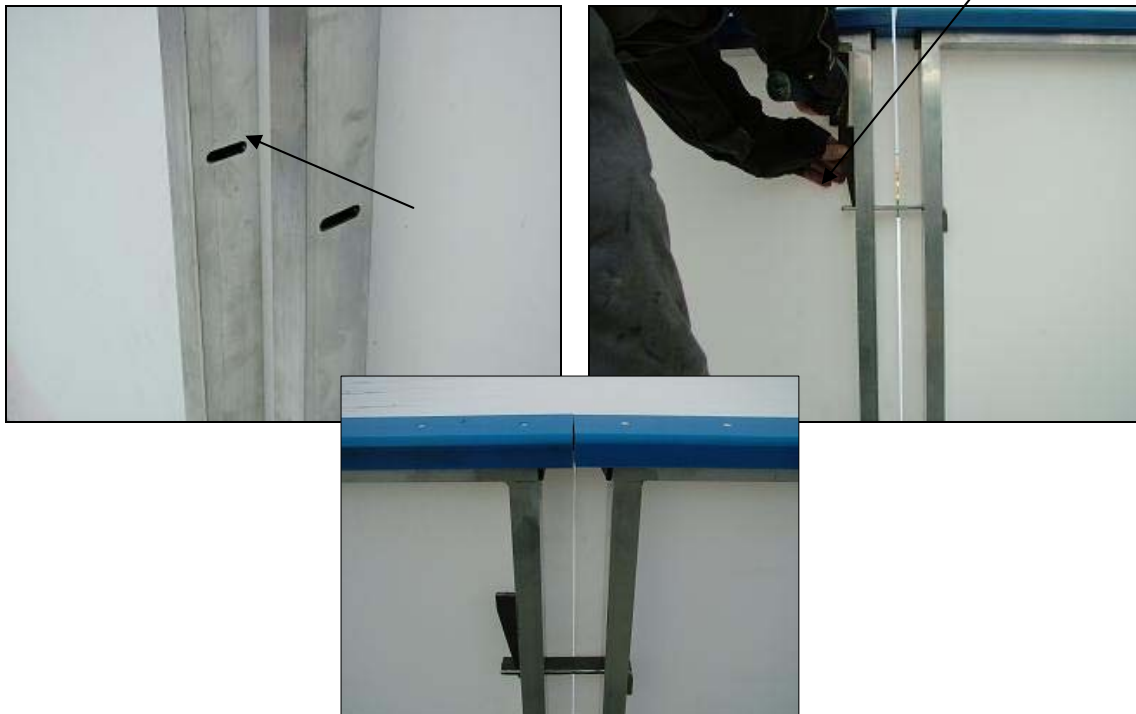


Afterwards the fence-elements can be justified in height with the worm-screws.



3.4. Advertisement slot

If the fence is built on the advertising-boards can be slide into the slot (5mm) which is made for.

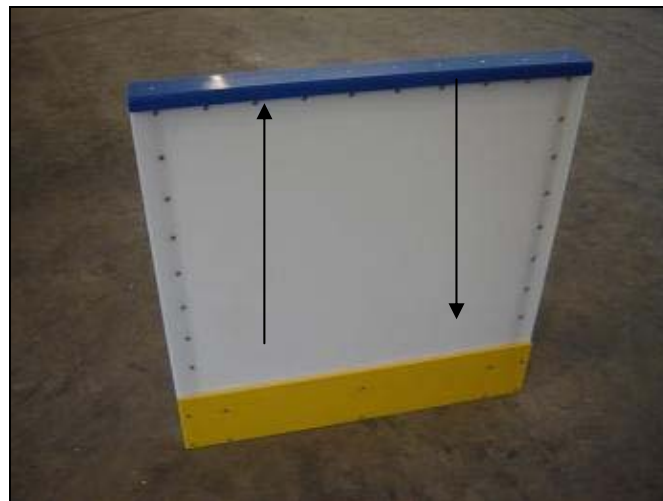



4. Reparation-manual

If a board-element, a bumper or other elements are broken or damaged, all elements can be ordered by SOLKAV so that everybody can change the elements by shelf.

5. Disassembling-stocking

The board-elements are UV- consistent and can be stock outdoor. Anyway it is better to stock the boards on pallets under a roof because of the dirt.



1. Contact data

SOLKAV GmbH
Floridusgasse 26
A-1210 Vienna

Tel: +43 (0)2745 830 28-0
Fax: +43 (0)1 270 34 26
email: office@solkav.eu

Service und Hotline:

Service Nr.: SOLKAV GmbH

- 0043 (0)2745/ 830 28 0
- 0043 (0)699/171 52 725

SOLKAV Partner

